

BLACK BITUMEN PAINT UN 1263

For the protection of metal and concrete

SURFACE PREPARATION: The surface to be coated must be free from rust, scale, dirt and unbonded or incompatible paint. Oil and grease should be removed with White Spirit. It may be advantageous to apply a coat of an anti-corrosive primer to metal surfaces prior to applying Bitumen.

APPLICATION: Stir before use. Apply by brush, roller or spray, care being taken to coat thoroughly all recesses edges, rivets, bolts. New or relatively new galvanised sheeting must be cleaned/degreased and preferably primed with a mordant solution or similar treatment.

IMPORTANT: Do not apply over tar based products, normal pigmented paints or surfaces that can rise above 65°C. Keep and store upright at all times especially in transit. Material should be stored out of direct sunlight at 8° - 25°C.

NUMBER OF COATS: Two recommended, however in severe conditions three coats for maximum protection. Allow 24 hours drying time between coats.

DRYING TIMES: 4 - 12 hours depending on conditions.

FINISH: Gloss on application. However strong sunlight will quickly cause loss of gloss followed later by a form of "chalking". This however is confined to the surface and provided adequate coatings have been applied protection is not impaired.

THINNERS: Not normally required, however the paint may be diluted with BSS245 Barretine White Spirit in order to adjust the viscosity for spraying.


CLEANING: Tools etc may be cleaned with Barretine White Spirit.

HEALTH, SAFETY & ENVIRONMENTAL INFORMATION

Danger

- Flammable liquid and vapour.
- May cause drowsiness or dizziness.
- Causes damage to organs through prolonged or repeated exposure.
- Toxic to aquatic life with long lasting effects.
- Keep out of reach of children.
- Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
- Avoid breathing vapour/spray.
- Wash contaminated skin thoroughly after handling.
- Use only outdoors or in a well-ventilated area.
- Wear protective gloves/protective clothing/eye protection/face protection.
- Store in a well-ventilated place. Keep container tightly closed.
- Dispose of contents/container in accordance with local regulations.

Contains hydrocarbons, C9-C12, n-alkanes, isoalkanes, cyclics, aromatics (2-25%)

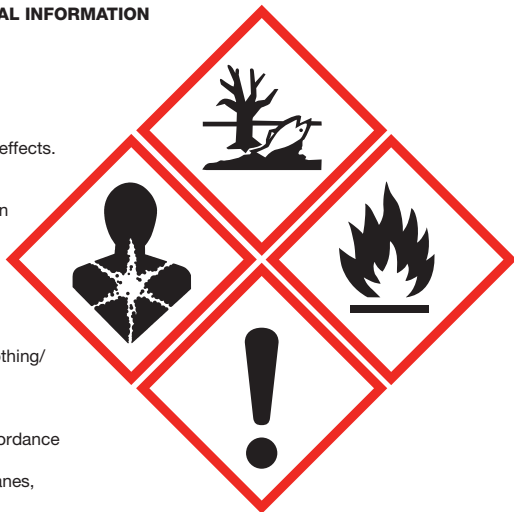

Very High: VOC content >50%

VOCs (Volatile Organic Compounds) Contribute to atmospheric pollution

EU Limit Value For This Product: (Cat. A/i) 600g/litre (2007) / 500g/litre (2010)

This product contains max 355g/litre



5 015861 440501 >

Barretine, St. Ivel Way, Warmley, Bristol BS30 8TY T +44 (0) 117 960 0060 F +44 (0) 117 935 2437 E sales@barretine.co.uk

www.barretine.co.uk